A WORLD OF COMFORT

HYDRONIC M

PRODUCT BENEFITS:

Reliable Passenger Comfort: consistent heat output supports a comfortable interior even in urban traffic with frequent door opening

Efficient Cold-Weather Operation: engine preheating supports easier starts while helping reduce fuel consumption and engine strain

Durable, Service-Friendly Design: a reduced number of components supports long service life and straightforward maintenance

TECHNICAL DATA:

PARAMETER[1]	Hydronic m8 Biodiesel	Hydronic m10	Hydronic m12
Fuel	Diesel and FAME (biodiesel)	Diesel	Diesel
Voltage	12 or 24 V	12 or 24 V	12 or 24 V
Heat Output	1.500 / 3.500 / 5.000 / 8.000 W	1.500 / 3.500 / 8.000 / 9.500 W	1.200 / 1.500 / 3.500 / 5.000 / 9.500 / 12.000 W
Fuel Consumption	0,18 / 0,4 / 0,65 / 0,9 l/h	0,18 / 0,4 / 0,9 / 1,2 l/h	0,15 / 0,18 / 0,4 / 0,65 / 1,2 / 1,5 l/h
Power Consumption, Heater	6 / 10 / 17 / 26 W	6 / 10 / 31 / 57 W	5 / 6 / 10 / 17 / 57 / 103 W
Power Consumption, Water Pump	29 W	29 W	29 W
Dimensions L × W × H	331 x 138 x 221 mm	331 x 138 x 221 mm	331 x 138 x 221 mm
Weight Empty	6,2 kg	6,2 kg	6,2 kg

[1] Contact Eberspächer for further details

KEY FEATURES:

- Multiple heating levels for demand-based heat output
- Integrated water pump for compact system installation
- Reliable flame and overheating monitoring
- Under-voltage protection to prevent excessive battery discharge
- Rotatable combustion-air intake for flexible installation
- Available for 12 V and 24 V electrical systems

EBERSPÄCHER SÜTRAK GMBH & CO. KG
Heinkelstrasse 5 | 71272 Renningen | Germany | Phone: +49 7159 923-0 | Fax: +49 7159 923-108 | info.Bus-Coach@eberspaecher.com | www.eberspaecher.com

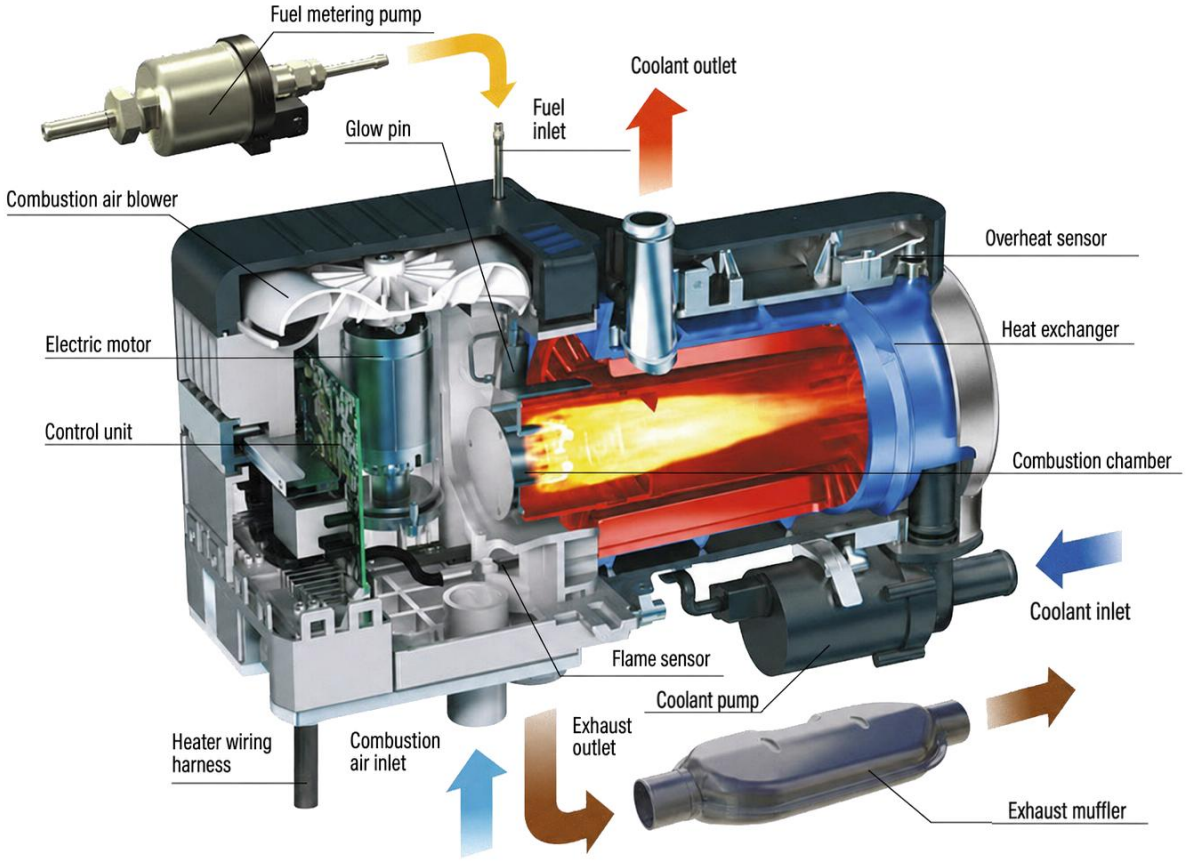

HYDRONIC M

EBERSPÄCHER SÜTRAK GMBH & CO. KG
Heinkelstrasse 5 | 71272 Renningen | Germany | Phone: +49 7159 923-0 | Fax: +49 7159 923-108 | info.Bus-Coach@eberspaecher.com | www.eberspaecher.com